

TLP521GB, TLP521-2GB, TLP521-4GB, TLP521,
 TLP521-2, TLP521-4, TLP521XGB, TLP521-2XGB, TLP521-4XGB
 TLP521X, TLP521-2X, TLP521-4X



**HIGH DENSITY MOUNTING
 PHOTOTRANSISTOR
 OPTICALLY COUPLED ISOLATORS**



ISOCOM
 COMPONENTS

APPROVALS

- UL recognised, File No. E91231
- 'X' SPECIFICATION APPROVALS
 - VDE 0884 in 3 available lead form :-
 - STD
 - G form
 - SMD approved to CECC 00802
 - BSI approved - Certificate No. 8001

DESCRIPTION


The TLP521, TLP521-2, TLP521-4 series of optically coupled isolators consist of infrared light emitting diodes and NPN silicon photo transistors in space efficient dual in line plastic packages.

FEATURES


- Options :-
 - 10mm lead spread - add G after part no.
 - Surface mount - add SM after part no.
 - Tape&reel - add SMT&R after part no.
- High Current Transfer Ratio (50% min)
- High Isolation Voltage (5.3kV_{RMS}, 7.5kV_{PK})
- High BV_{CEO} (55Vmin)
- All electrical parameters 100% tested
- Custom electrical selections available

APPLICATIONS




- Computer terminals
- Industrial systems controllers
- Measuring instruments
- Signal transmission between systems of different potentials and impedances

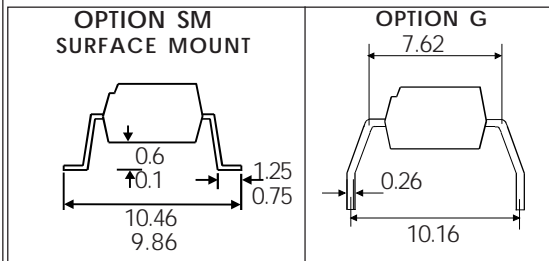





TLP521







Dimensions in mm



TLP521-2



TLP521-4

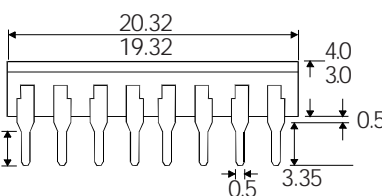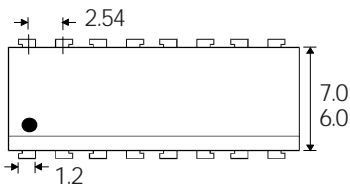

ISOCOM COMPONENTS LTD

Unit 25B, Park View Road West,
 Park View Industrial Estate, Brenda Road
 Hartlepool, Cleveland, TS25 1YD

原厂授权最优秀的一级代理商



深圳市伟莱达电子有限公司 网址:www.wellida.com

电话: (86)755-26070677 26070773 26078545

传真: (86)755- 2696 5316 邮箱:sales@wellida.com

ABSOLUTE MAXIMUM RATINGS
(25°C unless otherwise specified)

Storage Temperature _____ -55°C to +125°C
 Operating Temperature _____ -30°C to +100°C
 Lead Soldering Temperature
 (1/16 inch (1.6mm) from case for 10 secs) 260°C

INPUT DIODE

Forward Current _____ 50mA
 Reverse Voltage _____ 6V
 Power Dissipation _____ 70mW

OUTPUT TRANSISTOR

Collector-emitter Voltage BV_{CEO} _____ 55V
 Emitter-collector Voltage BV_{ECO} _____ 6V
 Collector Current _____ 50mA
 Power Dissipation _____ 150mW

POWER DISSIPATION

Total Power Dissipation _____ 200mW
 (derate linearly 2.67mW/°C above 25°C)

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F)	1.0	1.15	1.3	V	$I_F = 10\text{mA}$
	Reverse Current (I_R)			10	μA	$V_R = 4\text{V}$
Output	Collector-emitter Breakdown (BV_{CEO})	55			V	$I_C = 0.5\text{mA}$
	Emitter-collector Breakdown (BV_{ECO})	6			V	$I_E = 100\mu\text{A}$
	Collector-emitter Dark Current (I_{CEO})			100	nA	$V_{CE} = 20\text{V}$
Coupled	Current Transfer Ratio (CTR) (Note 2)					
	TLP521, TLP521-2, TLP521-4	50		600	%	$5\text{mA} I_F, 5\text{V} V_{CE}$
	CTR selection available					
	BL	200		600	%	
	CB	100		600	%	
	GB	30			%	$1\text{mA} I_F, 0.4\text{V} V_{CE}$
	Collector-emitter Saturation Voltage $V_{CE(SAT)}$			0.4	V	$8\text{mA} I_F, 2.4\text{mA} I_C$
	GB			0.4	V	$1\text{mA} I_F, 0.2\text{mA} I_C$
	Input to Output Isolation Voltage V_{ISO}	5300			V_{RMS}	See note 1
	Input-output Isolation Resistance R_{ISO}	5×10^{10}		7500	Ω	V_{PK} See note 1
	Response Time (Rise), tr		4		μs	$V_{IO} = 500\text{V}$ (note 1)
	Response Time (Fall), tf		3		μs	$V_{CE} = 2\text{V},$
Turn-on time, ton		3		μs	$I_C = 2\text{mA}, R_L = 100\Omega$	
Turn-off time, toff		3		μs		
Turn-on time, tON		2		μs	$R_L = 1.9\text{K}\Omega$	
Turn-off time, tOFF		25		μs	$V_{CC} = 5\text{V}, I_F = 16\text{mA}$	


Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.


Collector Power Dissipation vs. Ambient Temperature




Collector Current vs. Low Collector-emitter Voltage

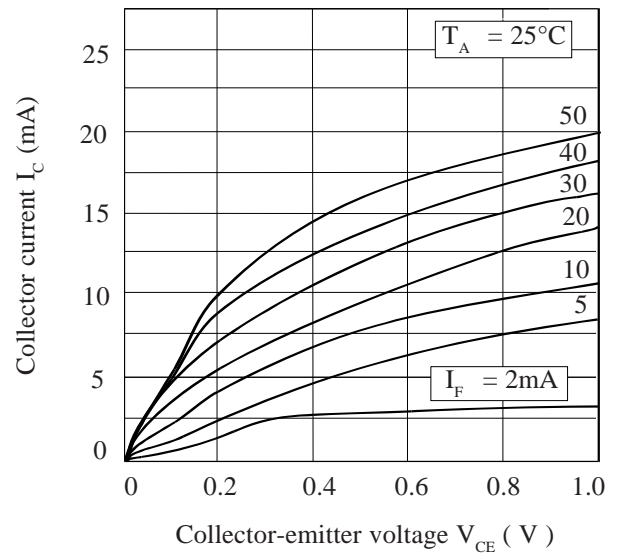


Forward Current vs. Ambient Temperature

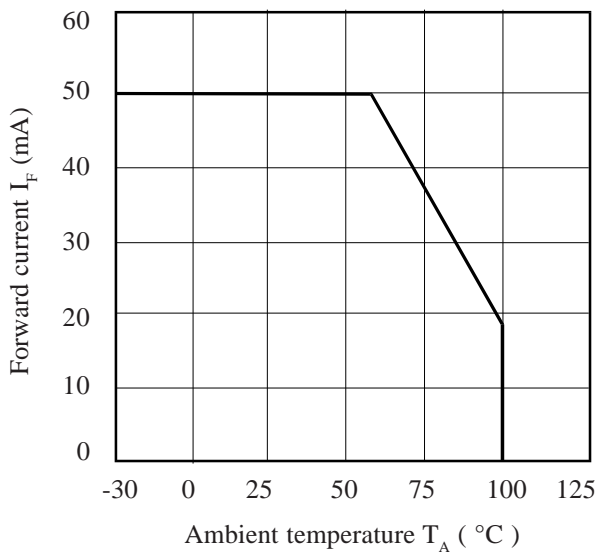

Collector Current vs. Collector-emitter Voltage

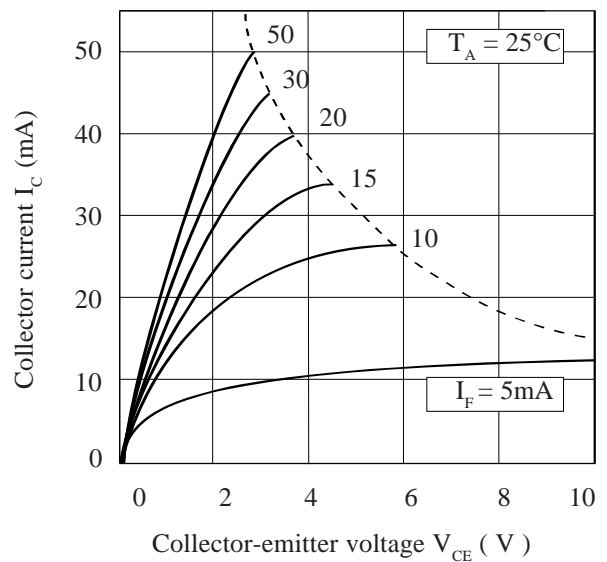

Collector-emitter Saturation Voltage vs. Ambient Temperature

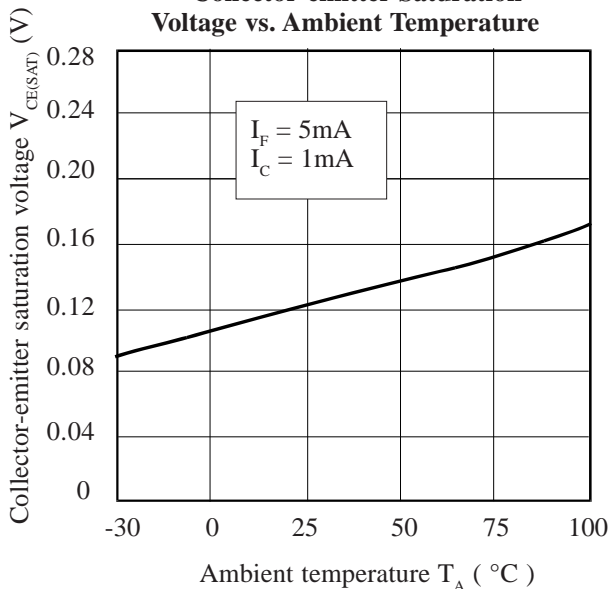

Current Transfer Ratio vs. Forward Current

