



SGM8581 Single-Supply, Single Rail-to-Rail I/O Precision Operational Amplifier

GENERAL DESCRIPTION

The SGM8581 is a single rail-to-rail input and output precision operational amplifier which has low input offset voltage and bias current. It is guaranteed to operate from 2.5V to 5.5V single supply.

The rail-to-rail input and output swings provided by the SGM8581 make both high-side and low-side sensing easy. The combination of characteristics makes the SGM8581 a good choice for temperature, position and pressure sensors, medical equipment and strain gauge amplifiers, or any other 2.5V to 5.5V applications requiring precision and long term stability.

The SGM8581 is specified for the extended industrial/automotive (-40°C to +125°C) temperature range. The SGM8581 is available in Green SOT-23-5, SOIC-8 and MSOP-8 packages.



APPLICATIONS

- Temperature Measurements
- Pressure Sensors
- Precision Current Sensings
- Electronic Scales
- Strain Gage Amplifiers
- Medical Instrumentation
- Thermocouple Amplifiers
- Handheld Test Equipment

FEATURES

- **Low Offset Voltage: 100 μ V (MAX)**
- **Rail-to-Rail Input and Output Swings**
- **2.5V to 5.5V Single-Supply Operation**
- **Voltage Gain: 145dB (TYP) at 5V**
- **PSRR: 120dB (TYP)**
- **CMRR: 90dB (TYP)**
- **Ultra Low Input Bias Current: 15pA**
- **Low Supply Current: 445 μ A at 5V**
- **Overload Recovery Time: 70 μ s (at $V_s = 5V$)**
- **No External Capacitors Required**
- **-40°C to +125°C Operating Temperature Range**
- **Available in Green SOT-23-5, SOIC-8 and MSOP-8 Packages**

PIN CONFIGURATIONS

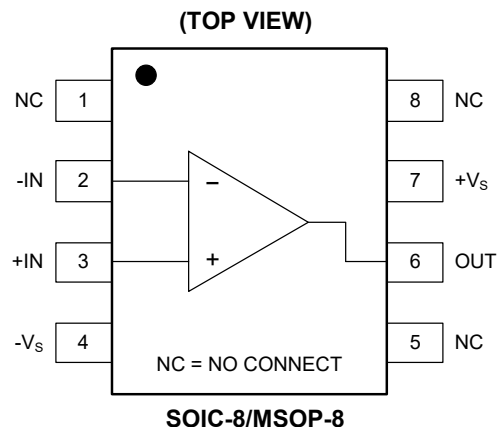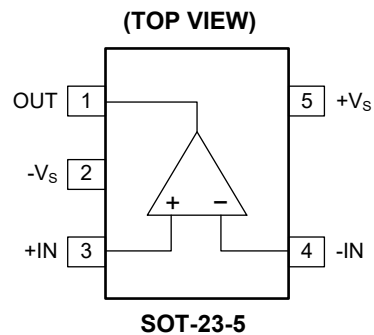


PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM8581	SOT-23-5	-40°C to +125°C	SGM8581XN5G/TR	S0BXX	Tape and Reel, 3000
	SOIC-8	-40°C to +125°C	SGM8581XS8G/TR	SGM8581XS8 XXXXX	Tape and Reel, 2500
	MSOP-8	-40°C to +125°C	SGM8581XMS8G/TR	SGM8581 XMS8 XXXXX	Tape and Reel, 3000


MARKING INFORMATION

NOTE: XX = Date Code. XXXXX = Date Code and Vendor Code.

SOT-23-5

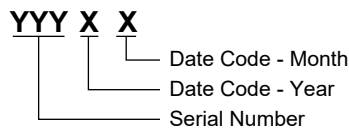

SOIC-8/MSOP-8

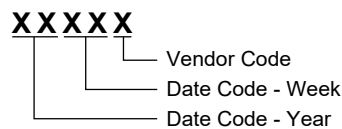

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

- Supply Voltage.....6V
- Input Voltage Range-V_S to (+V_S) + 0.1V
- Differential Input Voltage Range -5V to 5V
- Junction Temperature+150°C
- Storage Temperature Range.....-65°C to +150°C
- Lead Temperature (Soldering, 10s)+260°C
- ESD Susceptibility
- HBM (SOT-23-5).....6000V
- HBM (SOIC-8)7000V
- HBM (MSOP-8).....6000V
- MM.....400V

RECOMMENDED OPERATING CONDITIONS

- Operating Temperature Range-40°C to +125°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods

may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

ELECTRICAL CHARACTERISTICS(V_S = 5V, V_{CM} = 2.5V, V_{OUT} = 2.5V, Full = -40°C to +125°C, typical values are at T_A = +25°C, unless otherwise noted.)

PARAMETER	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
Input Characteristics						
Input Offset Voltage (V _{OS})		+25°C		25	100	μV
		Full			106	
Input Offset Voltage Drift (ΔV _{OS} /ΔT)		Full		100		nV/°C
Input Bias Current (I _B)		+25°C		15		pA
Input Offset Current (I _{OS})		+25°C		10		pA
Input Voltage Range		+25°C	0		5	V
Common Mode Rejection Ratio ⁽¹⁾ (CMRR)	V _{CM} = 0V to 5V	+25°C	80	90		dB
		Full	62			
Large-Signal Voltage Gain (A _{VO})	R _L = 10kΩ, V _{OUT} = 0.3V to 4.7V	+25°C	95	145		dB
		Full	91			
Output Characteristics						
Output Voltage High (V _{OH})	R _L = 100kΩ to -V _S	+25°C	4.99	4.998		V
		Full	4.979			
	R _L = 10kΩ to -V _S	+25°C	4.98	4.994		
		Full	4.96			
Output Voltage Low (V _{OL})	R _L = 100kΩ to +V _S	+25°C		2	10	mV
		Full			11	
	R _L = 10kΩ to +V _S	+25°C		6	15	
		Full			18	
Short-Circuit Limit (I _{SC})	V _{OUT} = 2.5V, R _L = 10Ω to GND	+25°C	40	45		mA
		Full	26			
Power Supply						
Power Supply Rejection Ratio ⁽¹⁾ (PSRR)	V _S = 2.5V to 5.5V	+25°C	90	120		dB
		Full	73			
Quiescent Current (I _Q)	V _{OUT} = V _S /2	+25°C		445	700	μA
		Full			845	
Dynamic Performance						
Gain-Bandwidth Product (GBP)	A _V = +100	+25°C		1.5		MHz
Slew Rate (SR)	A _V = +1, R _L = 10kΩ, 2V output step	+25°C		0.75		V/μs
Overload Recovery Time	A _V = -100, R _L = 10kΩ, V _{IN} = 200mV (RET to GND)	+25°C		0.07		ms
Noise						
Input Voltage Noise (e _{n P-P})	0.1Hz to 10Hz	+25°C		0.85		μV _{P-P}
Input Voltage Noise Density (e _n)	f = 1kHz	+25°C		47.5		nV/√Hz

NOTE: 1. PSRR and CMRR are affected by the matching between external gain-setting resistor ratios.


ELECTRICAL CHARACTERISTICS (continued)(V_S = 2.5V, V_{CM} = 1.25V, V_{OUT} = 1.25V, Full = -40°C to +125°C, typical values are at T_A = +25°C, unless otherwise noted.)

PARAMETER	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
Input Characteristics						
Input Offset Voltage (V _{OS})		+25°C		25	100	μV
		Full			127	
Input Offset Voltage Drift (ΔV _{OS} /ΔT)		Full		150		nV/°C
Input Bias Current (I _B)		+25°C		15		pA
Input Offset Current (I _{OS})		+25°C		10		pA
Input Voltage Range		+25°C	0		2.5	V
Common Mode Rejection Ratio ⁽¹⁾ (CMRR)	V _{CM} = 0V to 2.5V	+25°C	75	90		dB
		Full	61			
Large-Signal Voltage Gain (A _{VO})	R _L = 10kΩ, V _{OUT} = 0.3V to 2.4V	+25°C	95	140		dB
		Full	91			
Output Characteristics						
Output Voltage High (V _{OH})	R _L = 100kΩ to -V _S	+25°C	2.49	2.498		V
		Full	2.473			
	R _L = 10kΩ to -V _S	+25°C	2.48	2.497		
		Full	2.46			
Output Voltage Low (V _{OL})	R _L = 100kΩ to +V _S	+25°C		1	10	mV
		Full			11	
	R _L = 10kΩ to +V _S	+25°C		3	15	
		Full			16	
Short-Circuit Limit (I _{SC})	V _{OUT} = 1.25V, R _L = 10Ω to GND	+25°C	20	27		mA
		Full	14			
Power Supply						
Power Supply Rejection Ratio ⁽¹⁾ (PSRR)	V _S = 2.5V to 5.5V	+25°C	90	120		dB
		Full	73			
Quiescent Current (I _Q)	V _{OUT} = V _S /2	+25°C		440	700	μA
		Full			786	
Dynamic Performance						
Gain-Bandwidth Product (GBP)	A _V = +100	+25°C		1.45		MHz
Slew Rate (SR)	A _V = +1, R _L = 10kΩ, 2V output step	+25°C		0.75		V/μs
Overload Recovery Time	A _V = -100, R _L = 10kΩ, V _{IN} = 200mV (RET to GND)	+25°C		0.04		ms
Noise						
Input Voltage Noise (e _{n P-P})	0.1Hz to 10Hz	+25°C		0.9		μV _{P-P}
Input Voltage Noise Density (e _n)	f = 1kHz	+25°C		77		nV/√Hz

NOTE: 1. PSRR and CMRR are affected by the matching between external gain-setting resistor ratios.


TYPICAL PERFORMANCE CHARACTERISTICS

Large Signal Transient Response at +5V

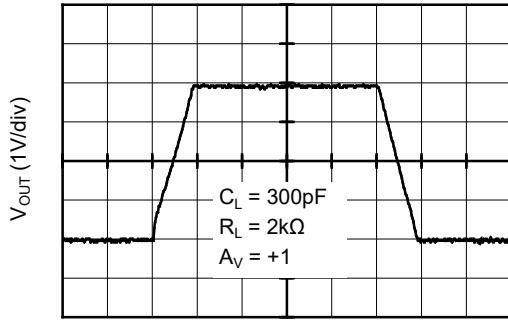


Time (5µs/div)

Large Signal Transient Response at +2.5V

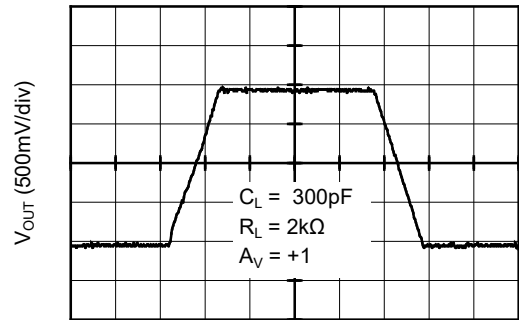


Time (2µs/div)

Small Signal Transient Response at +5V

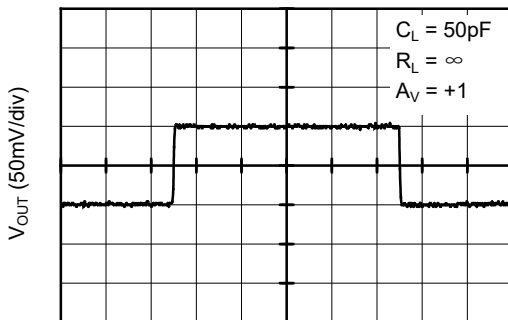


Time (5µs/div)

Small Signal Transient Response at +2.5V

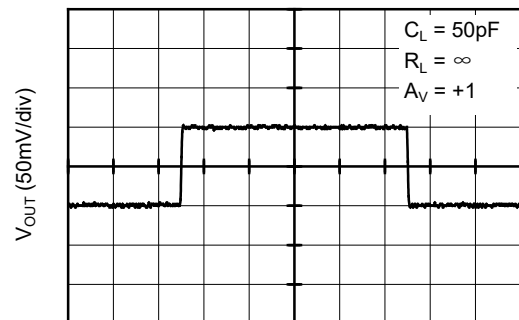


Time (5µs/div)

Closed Loop Gain vs. Frequency at +5V

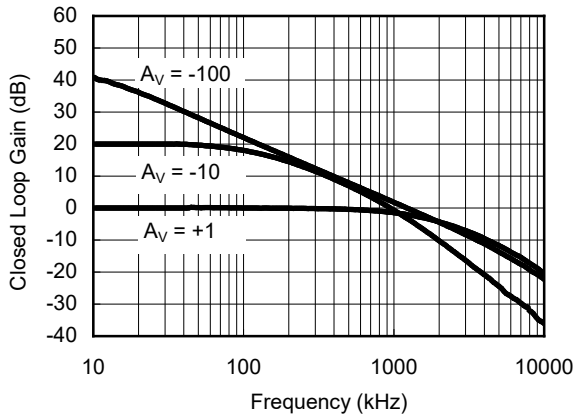


Closed Loop Gain vs. Frequency at +2.5V

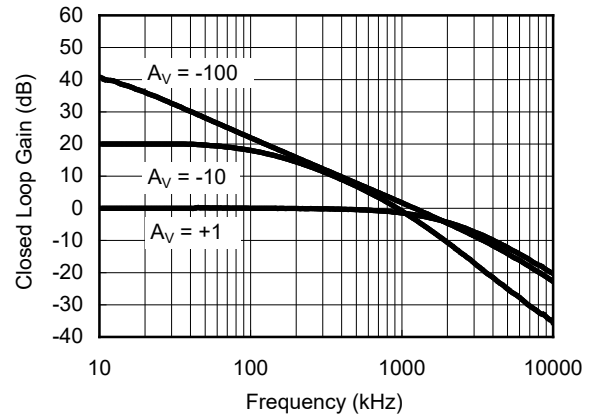


TYPICAL PERFORMANCE CHARACTERISTICS (continued)


0.1Hz to 10Hz Noise at +5V

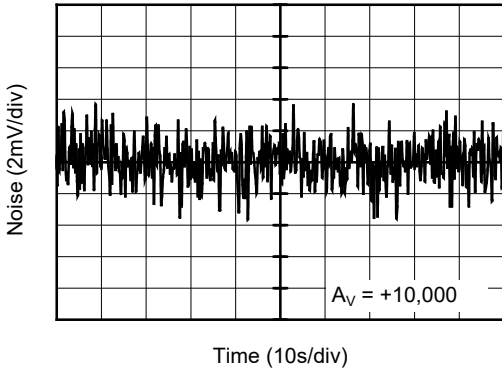


0.1Hz to 10Hz Noise at +2.5V

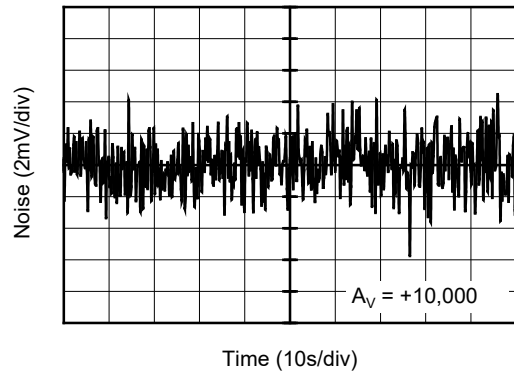


Negative Overtolerance Recovery

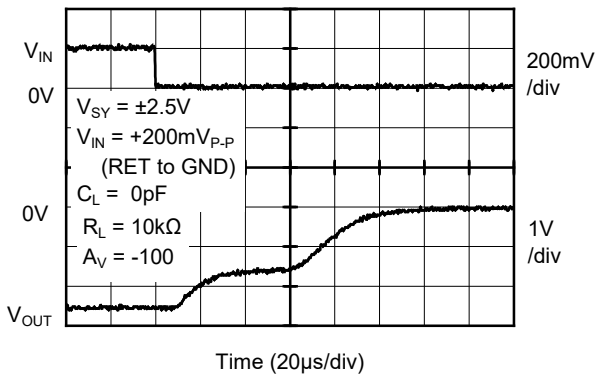


Positive Overtolerance Recovery

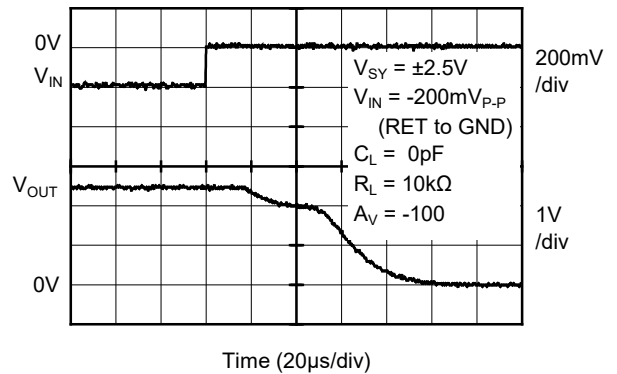

Open Loop Gain, Phase Shift vs. Frequency at +5V

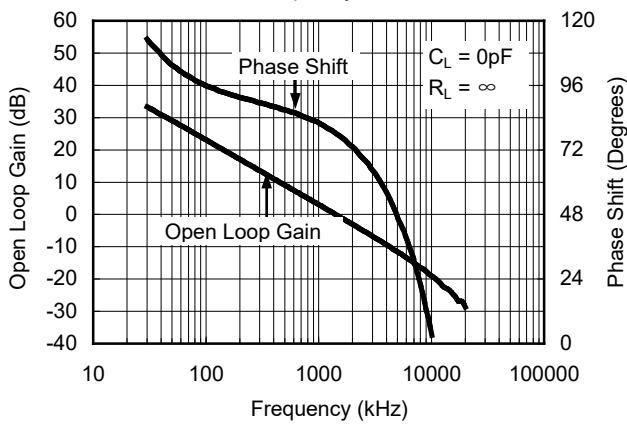


Open Loop Gain, Phase Shift vs. Frequency at +2.5V

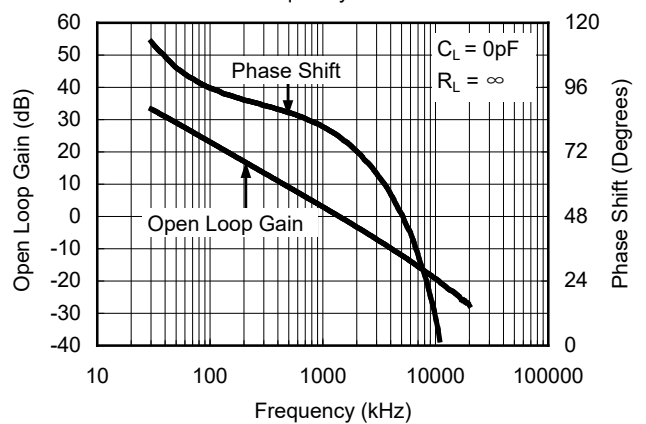


TYPICAL PERFORMANCE CHARACTERISTICS (continued)


Voltage Noise Density at +5V
from 0.1Hz to 2.5kHz

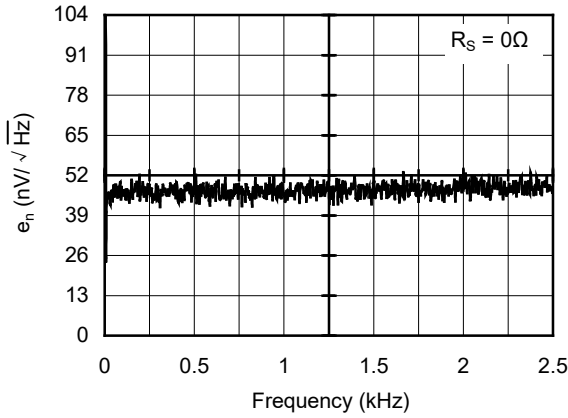


Voltage Noise Density at +2.5V
from 0.1Hz to 2.5kHz

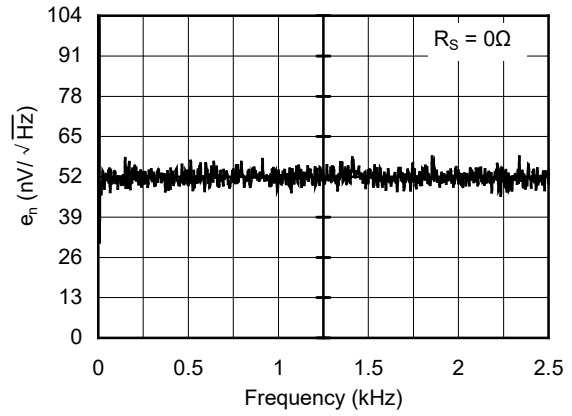


Voltage Noise Density at +5V
from 0.1Hz to 25kHz

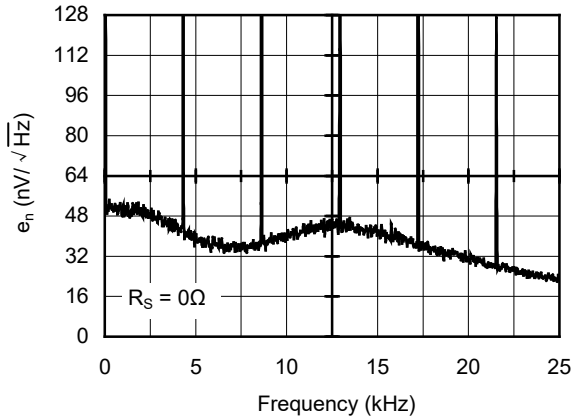


Voltage Noise Density at +2.5V
from 0.1Hz to 25kHz

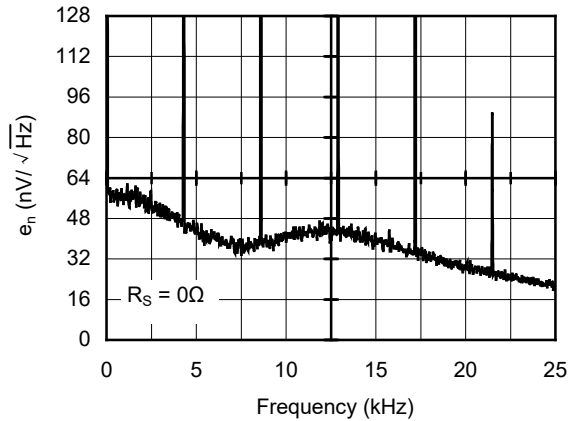





PSRR vs. Frequency at ±2.5V

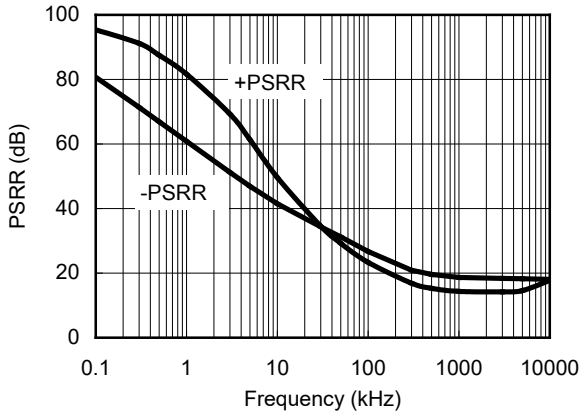

PSRR vs. Frequency at ±1.25V

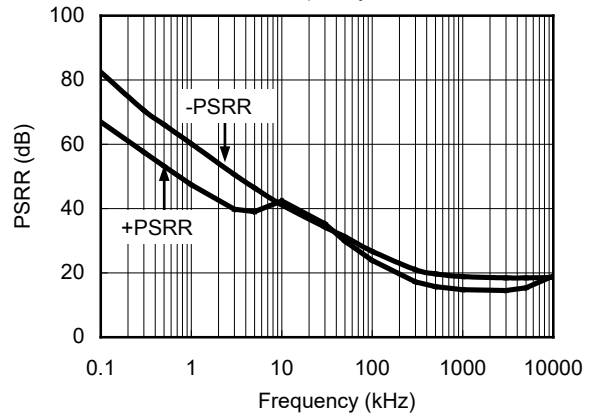

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

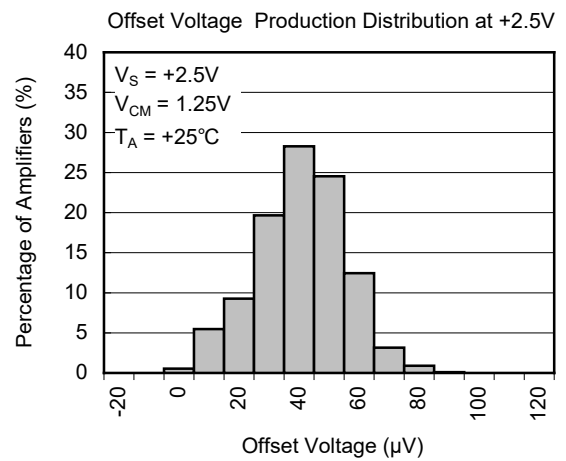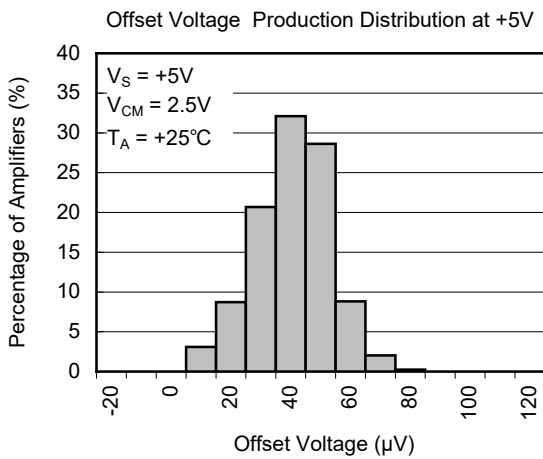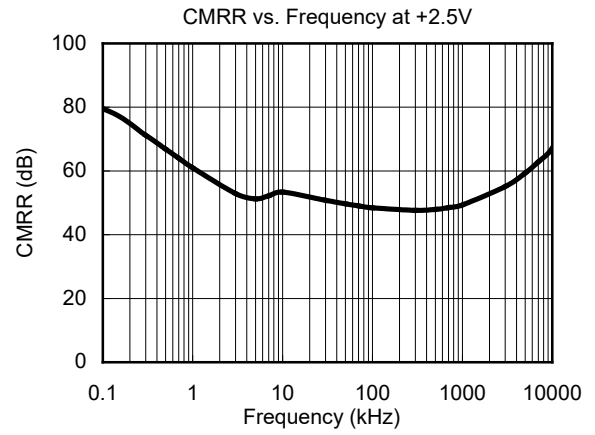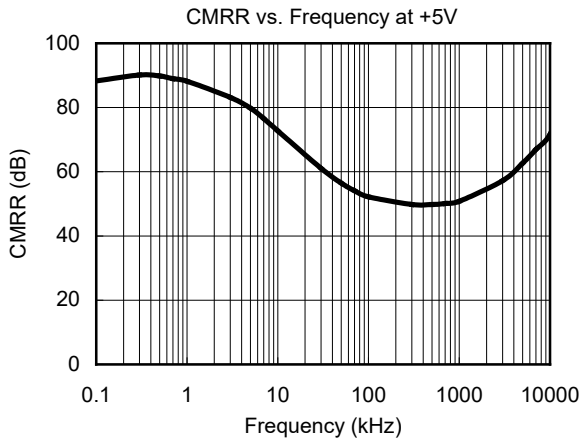

REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

JANUARY 2013 – REV.A.2 to REV.A.3	Page
Added Tape and Reel Information section	15, 16


DECEMBER 2011 – REV.A.1 to REV.A.2	Page
Updated Electrical Characteristics section	3, 4
Updated Typical Performance Characteristics section	7
Updated Package Outline Dimensions section	9~11

MAY 2011 – REV.A to REV.A.1	Page
Changed packages' name	All

Changes from Original (MARCH 2010) to REV.A	Page
Changed from product preview to production data	All

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

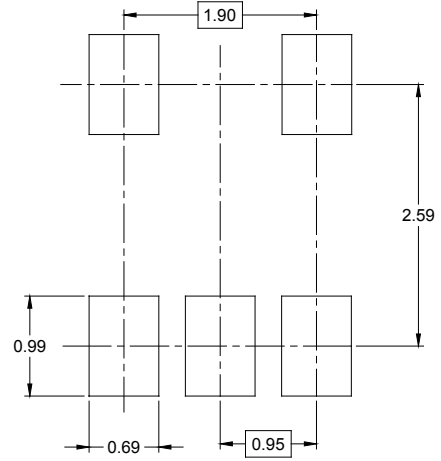



RECOMMENDED LAND PATTERN (Unit: mm)



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

PACKAGE OUTLINE DIMENSIONS


SOIC-8

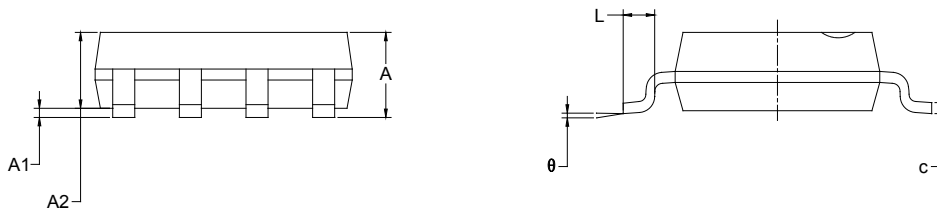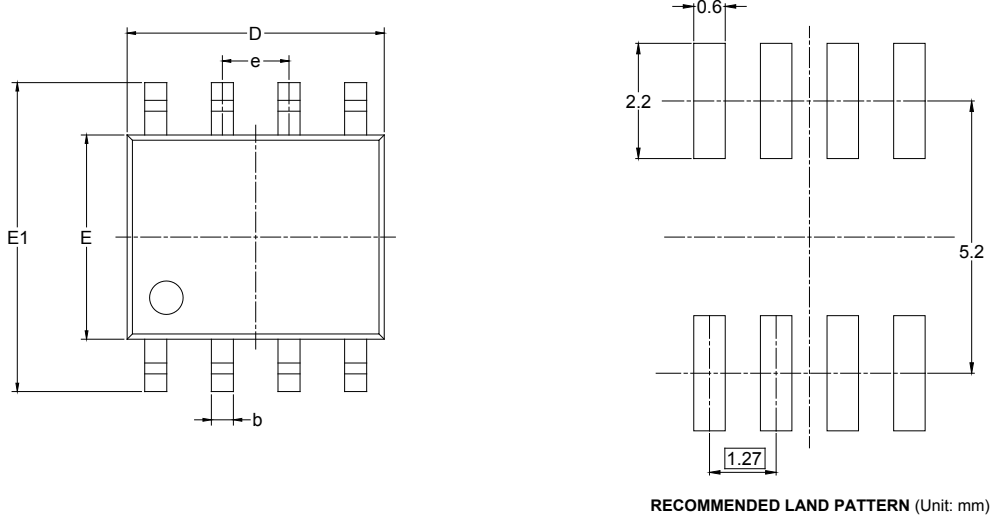


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.27 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

PACKAGE OUTLINE DIMENSIONS

MSOP-8

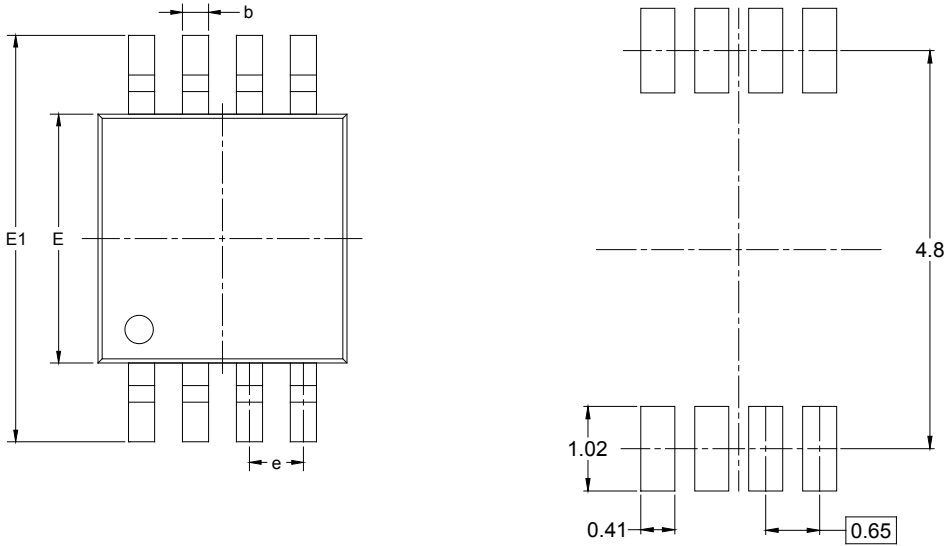

RECOMMENDED LAND PATTERN (Unit: mm)

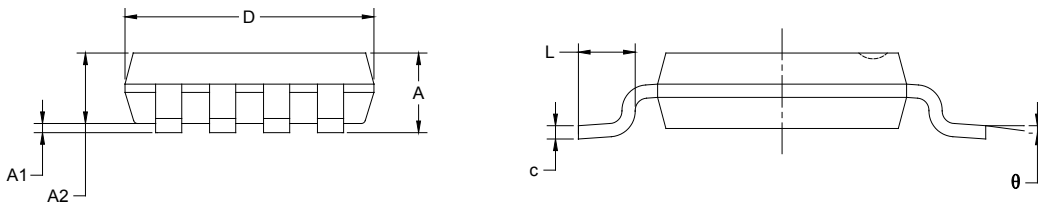

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
e	0.650 BSC		0.026 BSC	
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°

PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS



TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3
SOIC-8	13"	12.4	6.40	5.40	2.10	4.0	8.0	2.0	12.0	Q1
MSOP-8	13"	12.4	5.20	3.30	1.50	4.0	8.0	2.0	12.0	Q1

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18
13"	386	280	370	5

DD0002