

Ordering Information:

A2501WV-XP - *** - ** - **
1 2 3 4

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

46:Nylon 46,UL94V-0(Natural)

LCP: LCP,UL94V-0(Natural)

GWT: Nylon66,UL94V-0(Beige),IEC60335-1,5th

Edition Glow Wire Capable.

3.Color:

BK: Black BL: Blue



GN: Green GY: Gray

RD: Red YL: Yellow

4.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

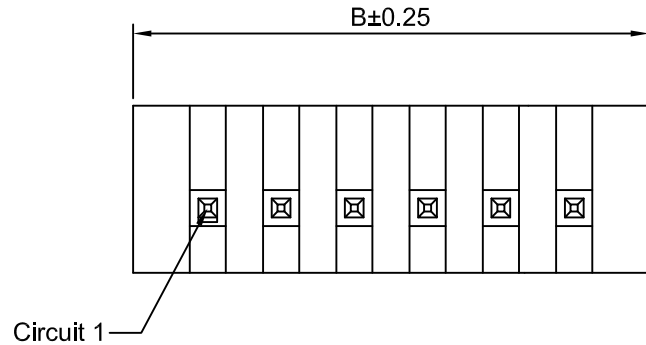

P.C.B LAYOUT
TOLERANCE:±0.05

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max



Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	7.60	12P	27.50	32.60
3P	5.00	10.10	13P	30.00	35.10
4P	7.50	12.60	14P	32.50	37.60
5P	10.00	15.10	15P	35.00	40.10
6P	12.50	17.60	16P	37.50	42.60
7P	15.00	20.10	17P	40.00	45.10
8P	17.50	22.60	18P	42.50	47.60
9P	20.00	25.10	19P	45.00	50.10
10P	22.50	27.60	20P	47.50	52.60
11P	25.00	30.10			

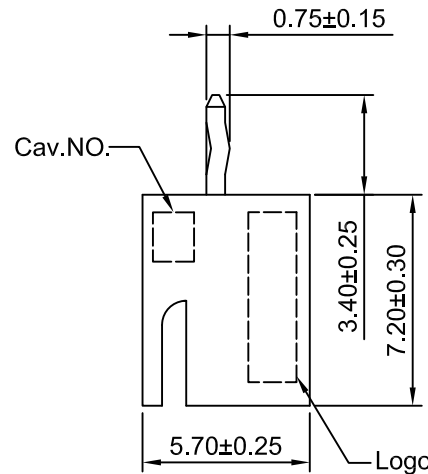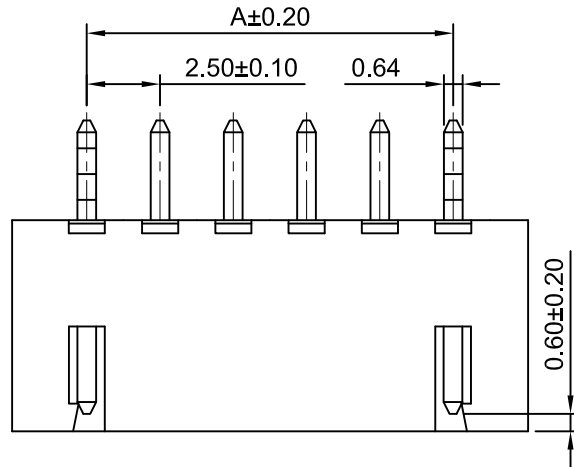

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
DRAWN	CHK'D	APPR'D
Halsen Li	Dankul Wan	Jack Yin

TITLE
2.50mm PITCH
VERTICAL WAFER

General Tolerances		THIRD ANGLE PROJECTION
A1	JL-GC-ECN00426	
A0	NEW RELEASE	
REV	DESCRIPTION	

DRAWING NO.	REV
A2501WV-XP	A1