




JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD.

TO-220-3L Plastic-Encapsulate Transistors


2SB772 TRANSISTOR (PNP)

FEATURES

- Low Speed Switching

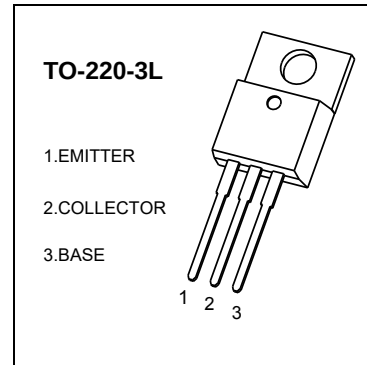


MARKING

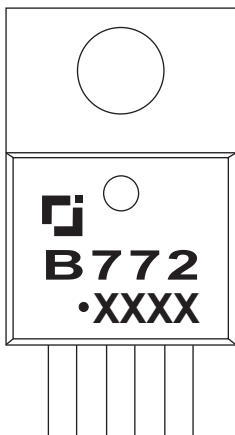

B772=Device code
Solid dot=Green moldinn compound device,
if none,the normal device
XXXX=Code

Equivalent Circuit



MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	-40	V
V_{CEO}	Collector-Emitter Voltage	-30	V
V_{EBO}	Emitter-Base Voltage	-6	V
I_C	Collector Current -Continuous	-3	A
P_C	Collector Power Dissipation	2	W
$R_{\theta JA}$	Thermal Resistance, junction to Ambient	62.5	$^{\circ}\text{C}/\text{W}$
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55-150	$^{\circ}\text{C}$








ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -100\mu A, I_E = 0$	-40			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -10mA, I_B = 0$	-30			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -100\mu A, I_C = 0$	-6			V
Collector cut-off current	I_{CBO}	$V_{CB} = -40V, I_E = 0$			-1	μA
Collector cut-off current	I_{CEO}	$V_{CE} = -30V, I_B = 0$			-10	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = -6V, I_C = 0$			-1	μA
DC current gain	h_{FE}	$V_{CE} = -2V, I_C = -1A$	60		400	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -2A, I_B = -0.2A$			-0.5	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -2A, I_B = -0.2A$			-1.5	V
Transition frequency	f_T	$V_{CE} = -5V, I_C = -0.1A$ $f = 10MHz$	50	80		MHz


CLASSIFICATION OF h_{FE}

Rank	R	O	Y	GR
Range	60-120	100-200	160-320	200-400

Typical Characteristics

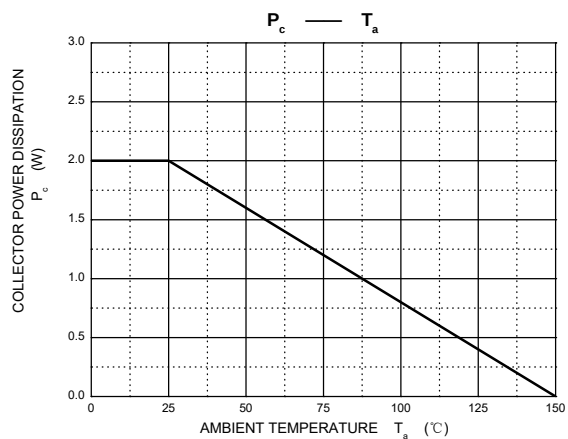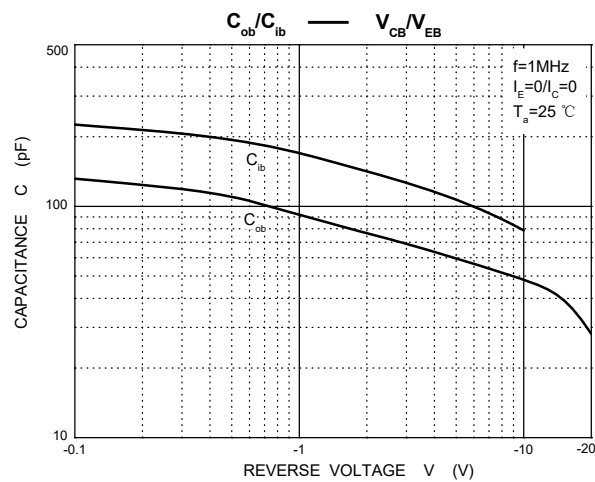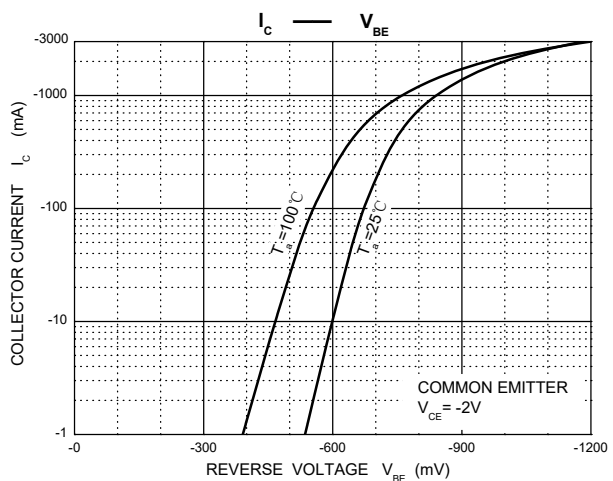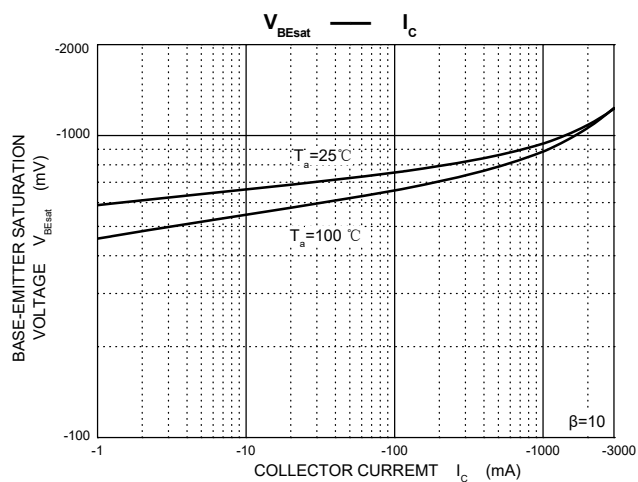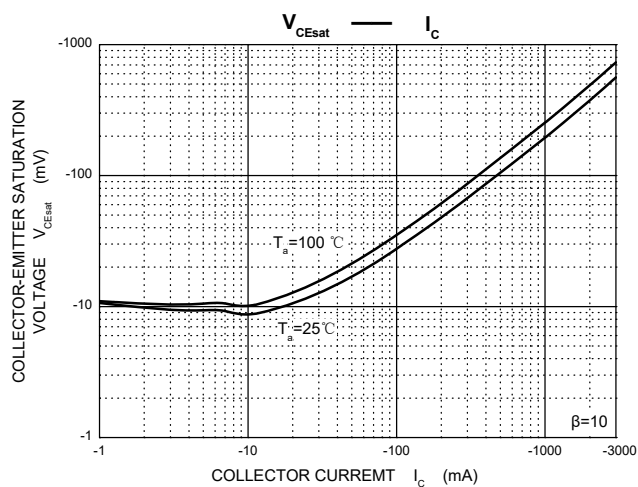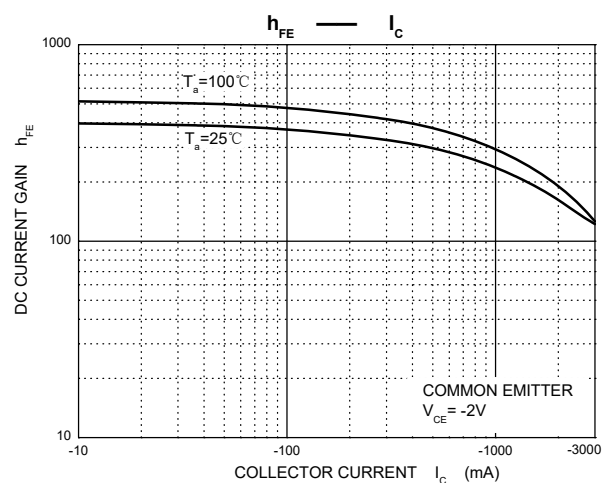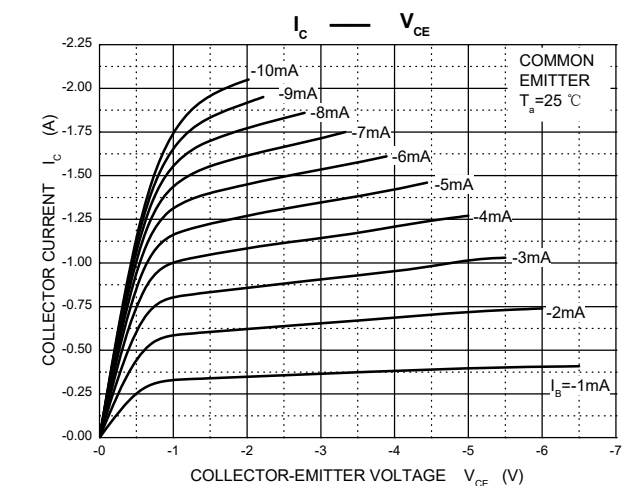

TO-220-3L Package Outline Dimensions

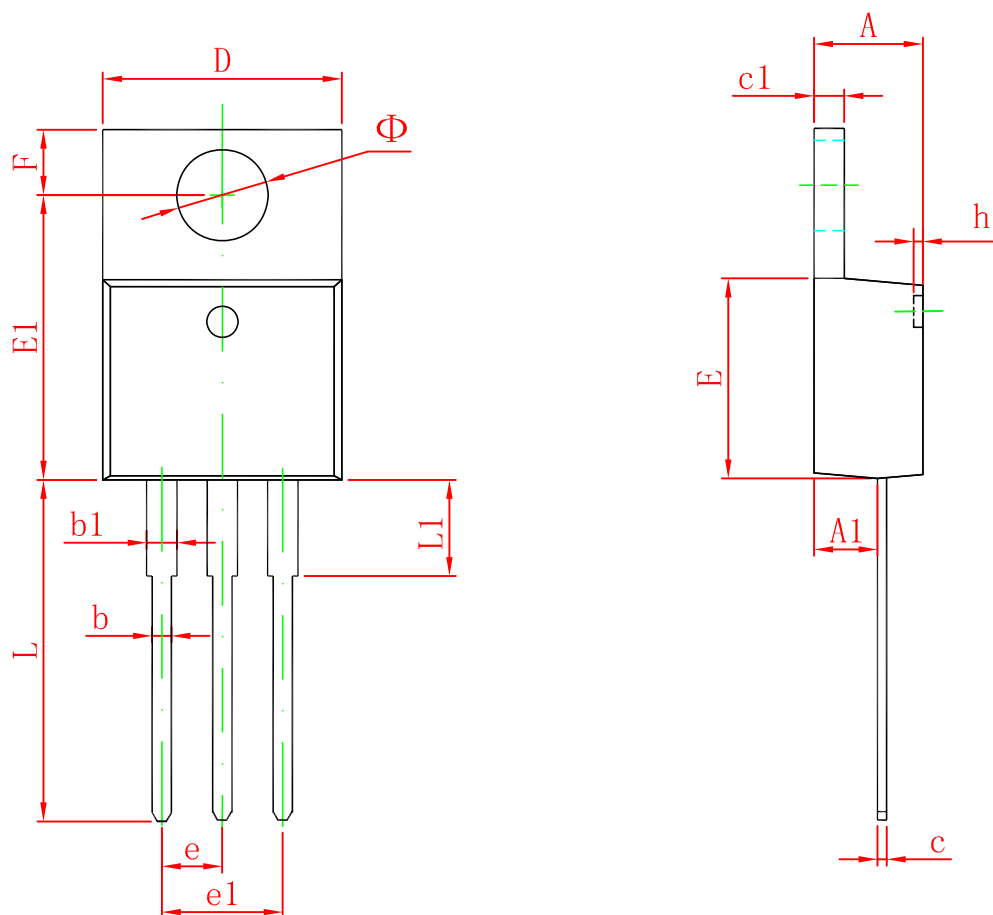

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	2.520	2.820	0.099	0.111
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
E1	12.060	12.460	0.475	0.491
e	2.540 TYP		0.100 TYP	
e1	4.980	5.180	0.196	0.204
F	2.590	2.890	0.102	0.114
h	0.000	0.300	0.000	0.012
L	13.400	13.800	0.528	0.543
L1	3.560	3.960	0.140	0.156
Φ	3.735	3.935	0.147	0.155