
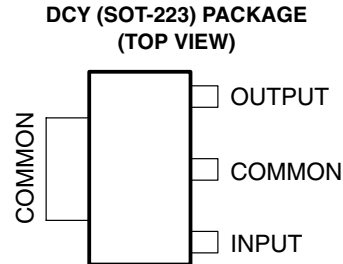


# uA78Mxx-Q1 SERIES POSITIVE-VOLTAGE REGULATORS

SLVS537B – JUNE 2004 – REVISED SEPTEMBER 2008

- Qualified for Automotive Applications
- 3-Terminal Regulators
- Output Current Up To 500 mA
- No External Components
- Internal Thermal-Overload Protection
- High Power-Dissipation Capability
- Internal Short-Circuit Current Limiting
- Output Transistor Safe-Area Compensation

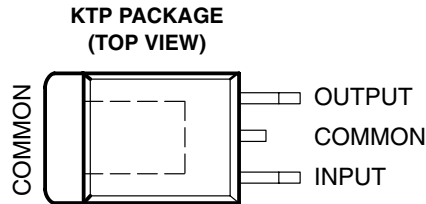

## description/ordering information

This series of fixed-voltage integrated-circuit voltage regulators is designed for a wide range of applications. These applications include on-card regulation for elimination of noise and distribution problems associated with single-point regulation. Each of these regulators can deliver up to 500 mA of output current. The internal current-limiting and thermal-shutdown features of these regulators essentially make them immune to overload. In addition to use as fixed-voltage regulators, these devices can be used with external components to obtain adjustable output voltages and currents and also as the power-pass element in precision regulators.

## ORDERING INFORMATION<sup>†</sup>

T <sub>J</sub>	V <sub>O(NOM)</sub> (V)	PACKAGE <sup>‡</sup>		ORDERABLE PART NUMBER	TOP-SIDE MARKING
-40°C to 125°C	3.3	PowerFLEX™ (KTP)	Reel of 3000	UA78M33QKTPRQ1	78M33CQ
		SOT-223 (DCY)	Reel of 2500	UA78M33QDCYRQ1	C3Q
	5	PowerFLEX™ (KTP)	Reel of 3000	UA78M05QKTPRQ1	78M05CQ
		SOT-223 (DCY)	Reel of 2500	UA78M05QDCYRQ1	C5Q
	8	PowerFLEX™ (KTP)	Reel of 3000	UA78M08QKTPRQ1	78M08CQ
		SOT-223 (DCY)	Reel of 2500	UA78M08QDCYRQ1	C8Q
	10	PowerFLEX™ (KTP)	Reel of 3000	UA78M10QKTPRQ1	78M10CQ

<sup>†</sup> For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).

<sup>‡</sup> Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerFLEX is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2008, Texas Instruments Incorporated

# uA78Mxx-Q1 SERIES POSITIVE-VOLTAGE REGULATORS

SLVS537B – JUNE 2004 – REVISED SEPTEMBER 2008

## schematic

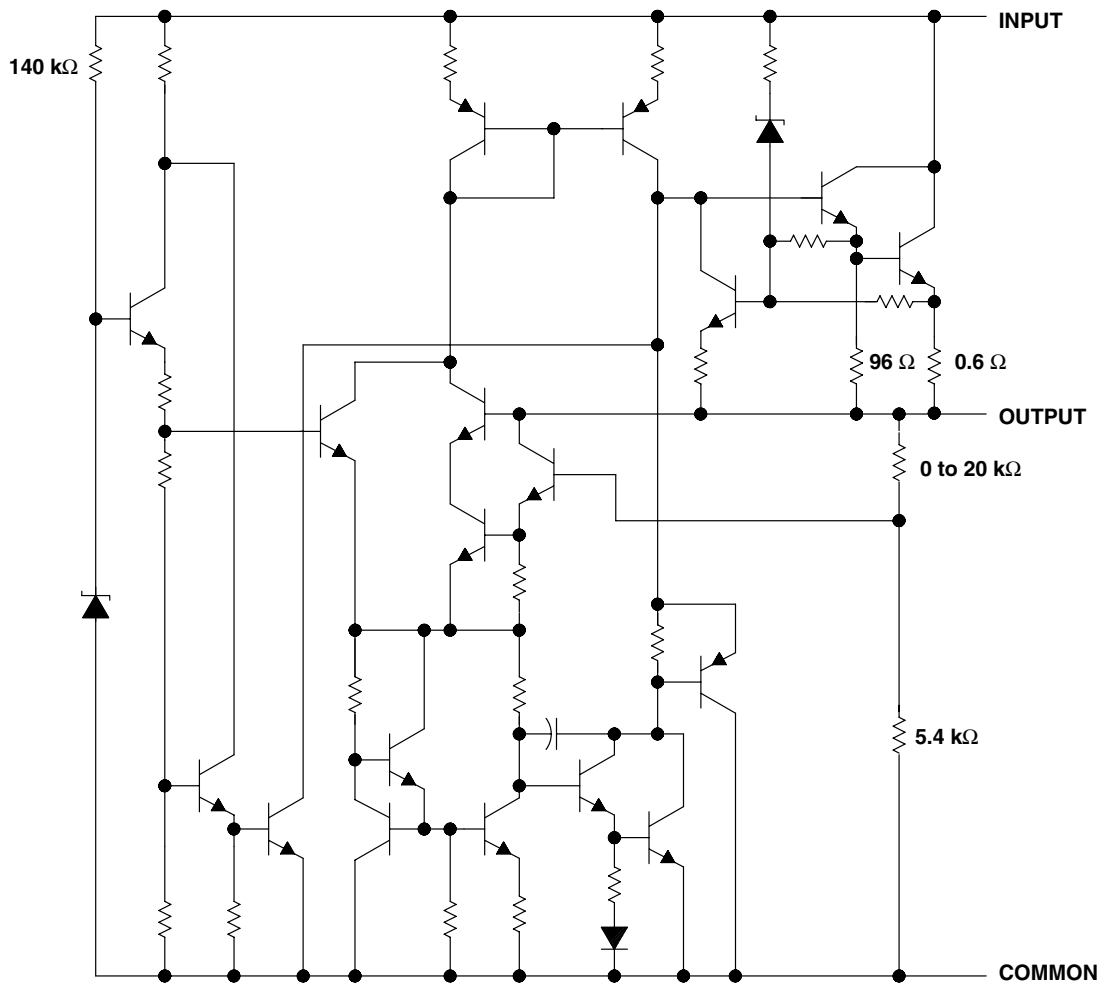

Resistor values shown are nominal.

# **uA78Mxx-Q1 SERIES** **POSITIVE-VOLTAGE REGULATORS**

SLVS537B – JUNE 2004 – REVISED SEPTEMBER 2008

## **absolute maximum ratings over virtual junction temperature range (unless otherwise noted)<sup>†</sup>**

Input voltage, $V_I$	35 V
Operating virtual junction temperature, $T_J$	150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C
Storage temperature range, $T_{stg}$	–65°C to 150°C

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

## **package thermal data (see Note 1)**

PACKAGE	BOARD	$\theta_{JC}$	$\theta_{JA}$
PowerFLEX (KTP)	High K, JESD 51-5	19°C/W	28°C/W
SOT-223 (DCY)	High K, JESD 51-7	4°C/W	53°C/W

NOTE 1: Maximum power dissipation is a function of  $T_J(\text{max})$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any allowable ambient temperature is  $P_D = (T_J(\text{max}) - T_A)/\theta_{JA}$ . Operating at the absolute maximum  $T_J$  of 150°C can affect reliability.

## **recommended operating conditions**

		MIN	MAX	UNIT
$V_I$	Input voltage	$\mu\text{A78M33}$	5.3	25
		$\mu\text{A78M05}$	7	25
		$\mu\text{A78M06}$	8	25
		$\mu\text{A78M08}$	10.5	25
		$\mu\text{A78M09}$	11.5	26
		$\mu\text{A78M10}$	12.5	28
		$\mu\text{A78M12}$	14.5	30
$I_O$	Output current		500	mA
$T_J$	Operating virtual junction temperature	–40	125	°C



# **uA78Mxx-Q1 SERIES** **POSITIVE-VOLTAGE REGULATORS**

SLVS537B – JUNE 2004 – REVISED SEPTEMBER 2008

**electrical characteristics at specified virtual junction temperature,  $V_I = 8\text{ V}$ ,  $I_O = 350\text{ mA}$ ,  $T_J = 25^\circ\text{C}$  (unless otherwise noted)**

PARAMETER	TEST CONDITIONS†	$\mu\text{A78M33Q}$			UNIT
		MIN	TYP	MAX	
Output voltage‡	$I_O = 5\text{ mA to }350\text{ mA}$ , $V_I = 8\text{ V to }20\text{ V}$		3.2	3.3	V
				3.4	
Input voltage regulation	$I_O = 200\text{ mA}$				mV
Ripple rejection	$V_I = 8\text{ V to }18\text{ V}$ , $f = 120\text{ Hz}$				dB
Output voltage regulation	$V_I = 8\text{ V}$ , $I_O = 5\text{ mA to }500\text{ mA}$				mV
Temperature coefficient of output voltage	$I_O = 5\text{ mA}$ , $T_J = -40^\circ\text{C to }125^\circ\text{C}$				$\text{mV}/^\circ\text{C}$
Output noise voltage	$f = 10\text{ Hz to }100\text{ kHz}$				$\mu\text{V}$
Dropout voltage					V
Bias current					mA
Bias current change	$I_O = 200\text{ mA}$ , $T_J = -40^\circ\text{C to }125^\circ\text{C}$				mA
Short-circuit output current	$V_I = 35\text{ V}$				mA
Peak output current					mA

† All characteristics are measured with a  $0.33\text{-}\mu\text{F}$  capacitor across the input and a  $0.1\text{-}\mu\text{F}$  capacitor across the output. Pulse-testing techniques maintain  $T_J$  as close to  $T_A$  as possible. Thermal effects must be taken into account separately.

‡ This specification applies only for dc power dissipation permitted by absolute maximum ratings.

**electrical characteristics at specified virtual junction temperature,  $V_I = 10\text{ V}$ ,  $I_O = 350\text{ mA}$ ,  $T_J = 25^\circ\text{C}$  (unless otherwise noted)**

PARAMETER	TEST CONDITIONS†	$\mu\text{A78M05Q}$			UNIT
		MIN	TYP	MAX	
Output voltage	$I_O = 5\text{ mA to }350\text{ mA}$ , $V_I = 7\text{ V to }20\text{ V}$		4.8	5	V
				5.2	
Input voltage regulation	$I_O = 200\text{ mA}$				mV
Ripple rejection	$V_I = 8\text{ V to }18\text{ V}$ , $f = 120\text{ Hz}$				dB
Output voltage regulation	$I_O = 5\text{ mA to }500\text{ mA}$				mV
Temperature coefficient of output voltage	$I_O = 5\text{ mA}$ , $T_J = -40^\circ\text{C to }125^\circ\text{C}$				$\text{mV}/^\circ\text{C}$
Output noise voltage	$f = 10\text{ Hz to }100\text{ kHz}$				$\mu\text{V}$
Dropout voltage					V
Bias current					mA
Bias current change	$I_O = 200\text{ mA}$ , $T_J = -40^\circ\text{C to }125^\circ\text{C}$				mA
Short-circuit output current	$V_I = 35\text{ V}$				mA
Peak output current					A

† All characteristics are measured with a  $0.33\text{-}\mu\text{F}$  capacitor across the input and a  $0.1\text{-}\mu\text{F}$  capacitor across the output. Pulse-testing techniques maintain  $T_J$  as close to  $T_A$  as possible. Thermal effects must be taken into account separately.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# **uA78Mxx-Q1 SERIES** **POSITIVE-VOLTAGE REGULATORS**

SLVS537B – JUNE 2004 – REVISED SEPTEMBER 2008

**electrical characteristics at specified virtual junction temperature,  $V_I = 14$  V,  $I_O = 350$  mA,  $T_J = 25^\circ\text{C}$  (unless otherwise noted)**

PARAMETER	TEST CONDITIONS†			$\mu\text{A78M08Q}$			UNIT
				MIN	TYP	MAX	
Output voltage	$V_I = 10.5$ V to 23 V, $I_O = 5$ mA to 350 mA	$T_J = -40^\circ\text{C}$ to $125^\circ\text{C}$		7.7	8	8.3	V
				7.6		8.4	
Input voltage regulation	$I_O = 200$ mA	$V_I = 10.5$ V to 25 V		6	100		mV
		$V_I = 11$ V to 25 V		2	50		
Ripple rejection	$V_I = 11.5$ V to 21.5 V, $f = 120$ Hz	$I_O = 100$ mA, $T_J = -40^\circ\text{C}$ to $125^\circ\text{C}$		56			dB
		$I_O = 300$ mA		56	80		
Output voltage regulation	$I_O = 5$ mA to 500 mA			25	160		mV
	$I_O = 5$ mA to 200 mA			10	80		
Temperature coefficient of output voltage	$I_O = 5$ mA, $T_J = -40^\circ\text{C}$ to $125^\circ\text{C}$			-1			mV/ $^\circ\text{C}$
Output noise voltage	$f = 10$ Hz to 100 kHz			52			$\mu\text{V}$
Dropout voltage				2			V
Bias current				4.6	6		mA
Bias current change	$V_I = 10.5$ V to 25 V, $I_O = 200$ mA, $T_J = -40^\circ\text{C}$ to $125^\circ\text{C}$					0.8	mA
	$I_O = 5$ mA to 350 mA, $T_J = -40^\circ\text{C}$ to $125^\circ\text{C}$					0.5	
Short-circuit output current	$V_I = 35$ V			250			mA
Peak output current				0.7			A

† All characteristics are measured with a 0.33- $\mu\text{F}$  capacitor across the input and a 0.1- $\mu\text{F}$  capacitor across the output. Pulse-testing techniques maintain  $T_J$  as close to  $T_A$  as possible. Thermal effects must be taken into account separately.

**electrical characteristics at specified virtual junction temperature,  $V_I = 17$  V,  $I_O = 350$  mA,  $T_J = 25^\circ\text{C}$  (unless otherwise noted)**

PARAMETER	TEST CONDITIONS†			$\mu\text{A78M10Q}$			UNIT
				MIN	TYP	MAX	
Output voltage	$V_I = 12.5$ V to 25 V, $I_O = 5$ mA to 350 mA	$T_J = -40^\circ\text{C}$ to $125^\circ\text{C}$		9.6	10	10.4	V
				9.5		10.5	
Input voltage regulation	$I_O = 200$ mA	$V_I = 12.5$ V to 28 V		7	100		mV
		$V_I = 14$ V to 28 V		2	50		
Ripple rejection	$V_I = 15$ V to 25 V, $f = 120$ Hz	$I_O = 100$ mA, $T_J = -40^\circ\text{C}$ to $125^\circ\text{C}$		59			dB
		$I_O = 300$ mA		55	80		
Output voltage regulation	$I_O = 5$ mA to 500 mA			25	200		mV
	$I_O = 5$ mA to 200 mA			10	100		
Temperature coefficient of output voltage	$I_O = 5$ mA, $T_J = -40^\circ\text{C}$ to $125^\circ\text{C}$			-1			mV/ $^\circ\text{C}$
Output noise voltage	$f = 10$ Hz to 100 kHz			64			$\mu\text{V}$
Dropout voltage				2			V
Bias current				4.7	6		mA
Bias current change	$V_I = 12.5$ V to 28 V, $I_O = 200$ mA, $T_J = -40^\circ\text{C}$ to $125^\circ\text{C}$					0.8	mA
	$I_O = 5$ mA to 350 mA, $T_J = -40^\circ\text{C}$ to $125^\circ\text{C}$					0.5	
Short-circuit output current	$V_I = 35$ V			245			mA
Peak output current				0.7			A

† All characteristics are measured with a 0.33- $\mu\text{F}$  capacitor across the input and a 0.1- $\mu\text{F}$  capacitor across the output. Pulse-testing techniques maintain  $T_J$  as close to  $T_A$  as possible. Thermal effects must be taken into account separately.



## PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">UA78M05QDCYRG4Q1</a>	Active	Production	SOT-223 (DCY)   4	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	C5Q
UA78M05QDCYRQ1	Active	Production	SOT-223 (DCY)   4	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	C5Q
<a href="#">UA78M33QDCYRG4Q1</a>	Active	Production	SOT-223 (DCY)   4	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	C3Q

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

### OTHER QUALIFIED VERSIONS OF UA78M-Q1 :

- Catalog : [UA78M](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
UA78M05QDCYRG4Q1	SOT-223	DCY	4	2500	330.0	12.4	6.8	7.3	1.88	8.0	12.0	Q3
UA78M33QDCYRG4Q1	SOT-223	DCY	4	2500	330.0	12.4	6.83	7.42	1.88	8.0	12.0	Q3



## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
UA78M05QDCYRG4Q1	SOT-223	DCY	4	2500	346.0	346.0	29.0
UA78M33QDCYRG4Q1	SOT-223	DCY	4	2500	346.0	346.0	29.0

DCY (R-PDSO-G4)


PLASTIC SMALL-OUTLINE

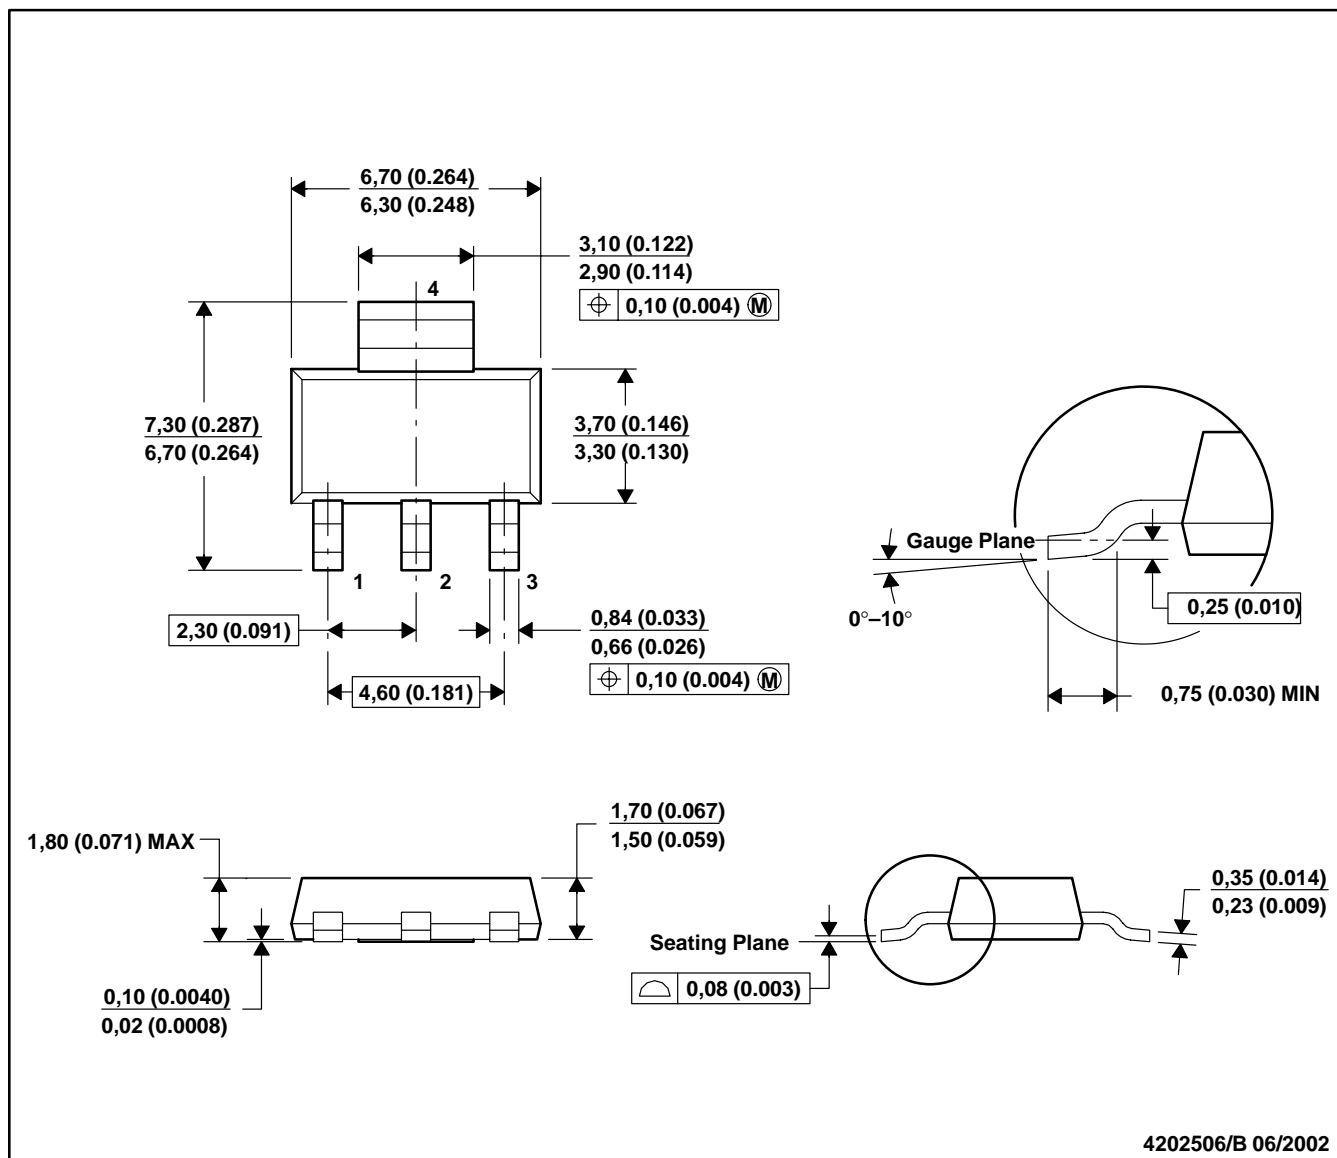

- NOTES:
- All linear dimensions are in millimeters (inches).
  - This drawing is subject to change without notice.
  - Body dimensions do not include mold flash or protrusion.
  - Falls within JEDEC TO-261 Variation AA.

DCY (R-PDSO-G4)

PLASTIC SMALL OUTLINE

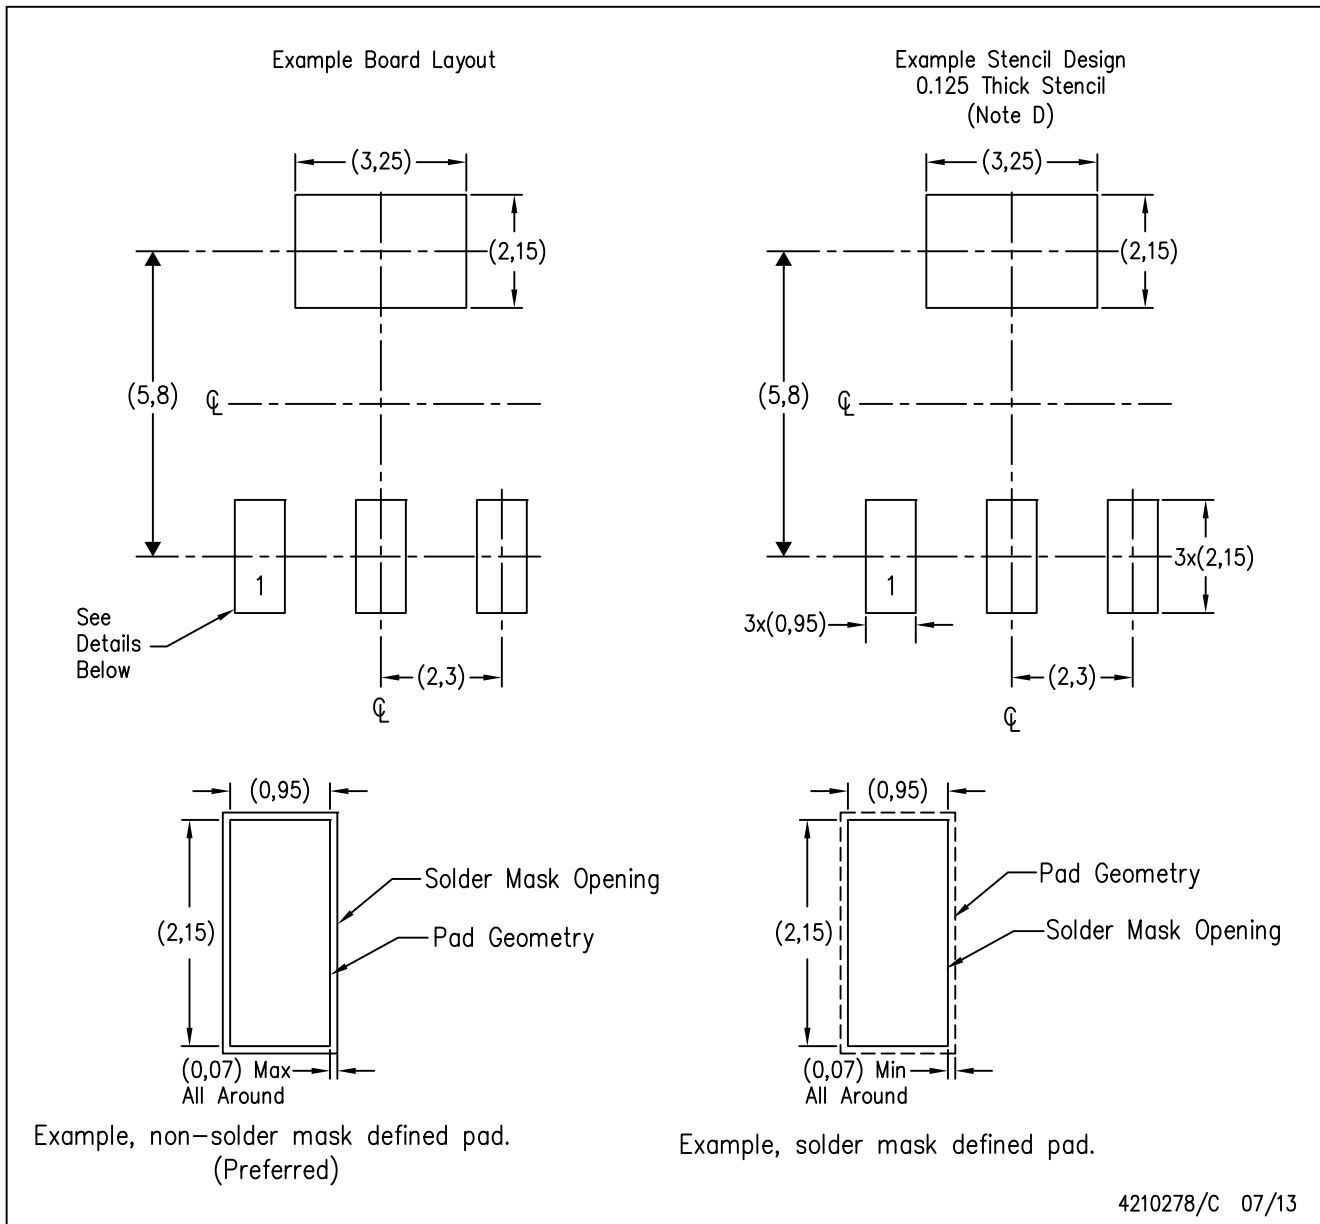

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil recommendations. Refer to IPC 7525 for stencil design considerations.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated